


Power Decks

Increase saw Output 50%, Eliminate "Bottlenecks"


Electronic positioning system moves material automatically; increasing sawyers output 50%.




SM-Cyclo[®] gear motor, with the manual foot pedal, is rated 97% shock load.

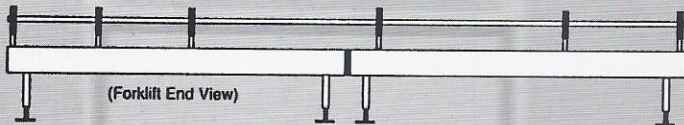

Standard deck height is 36" (custom heights are available upon request). Each leg has a total of 8" adjustment (4" up and 4" down) for leveling. Swivel feet allow for maximum contact with the ground.

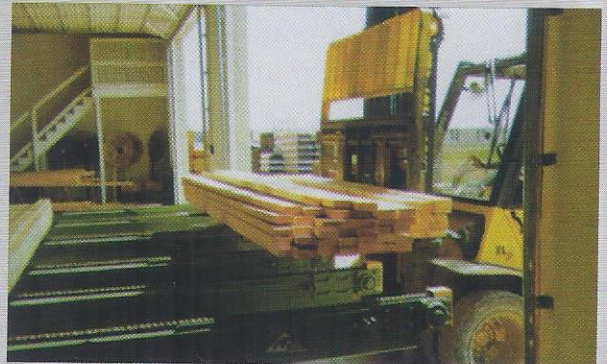

Our Transverse I-Beam construction is split in the middle; making installation quick and easy! Simply level each half then bolt together.

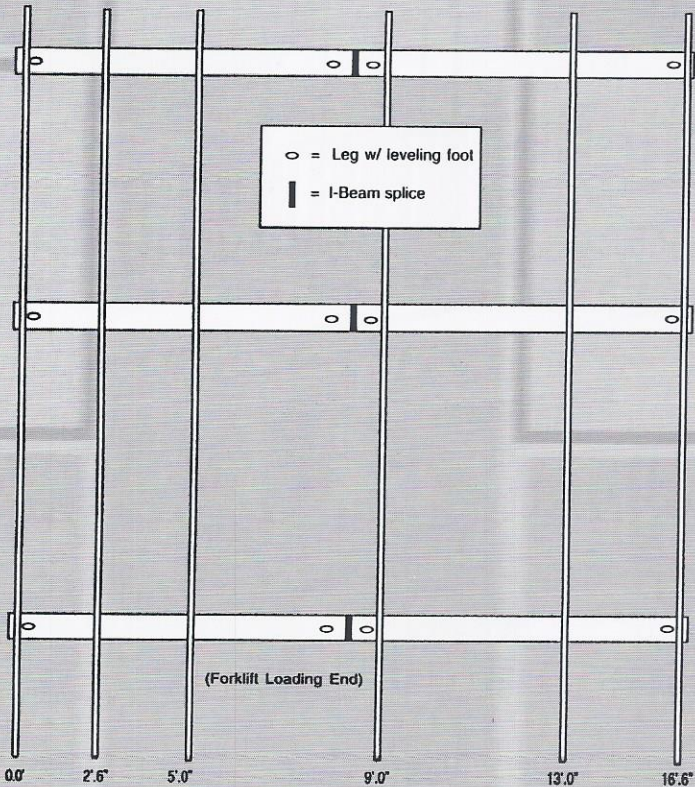

Side Eject

Additional Material Handling Systems for creating buffer zones on the output side of the saw. Custom made for your facility.



All chain spacing measurements are from the center of the conveyor chains. This spacing of the PD2506 (6chain model) allows this Power Deck to accommodate lumber lengths ranging from 3' to 20'.